

Public Footpath

Highway Road

Public Footpath

**General Notes**  
 THIS DOCUMENT IS THE PROPERTY OF ASL. SUBJECT MATTER IS CONFIDENTIAL. DO NOT DISCLOSE, COPY OR STORE ON INFORMATION RETRIEVAL SYSTEMS OR USE FOR ANY PURPOSE EXCEPT WITH THE PRIOR WRITTEN CONSENT OF ASL.

ALL CIVIL WORK, INCLUDING FOUNDATIONS, REMOVAL OF SHUTTERING, GROUTING IN AND MAKING GOOD OF SURFACE FINISHES BY OTHERS. TOP SURFACES OF FOUNDATIONS TO BE CAST TO SAME DATUM SMOOTH, LEVEL AND FLAT. BASES TO BE POURED SEVEN DAYS PRIOR TO INSTALLATION. MINIMUM CRUSHING STRENGTH OF CONCRETE. TO BE 30 N/MM2.

DUCTINGS TO BE 50MM DIA, TO HAVE SLOW BENDS COMPLETE WITH DRAW ROPES.

Please note mains supply by others. Also we assume site water table levels are below the bollard cylinders & has suitable natural drainage - POA for additional drainage systems subject to customer notification.

**Key**  
 Safety Induction Loop - -----  
 Free Exit loop - -----  
 50mm Duct - -----

No.	Revision/Issue	Date
	REV 3.1	25/09/19
	REV 3	24/09/19


AUTOGATE SYSTEMS LTD,  
 24/25 Tonge Bridge Way,  
 Tonge Bridge Industrial Estate,  
 Bolton,  
 BL2 6BD  
 TEL: 01204 396030  
 www.autogate-systems.co.uk

Project Name and Address

Project Sample Bollard	Sheet 1/1
Date 20.09.2022	
Scale 1.50 @ A3	

Hillsdown House Reception

Boundary Line

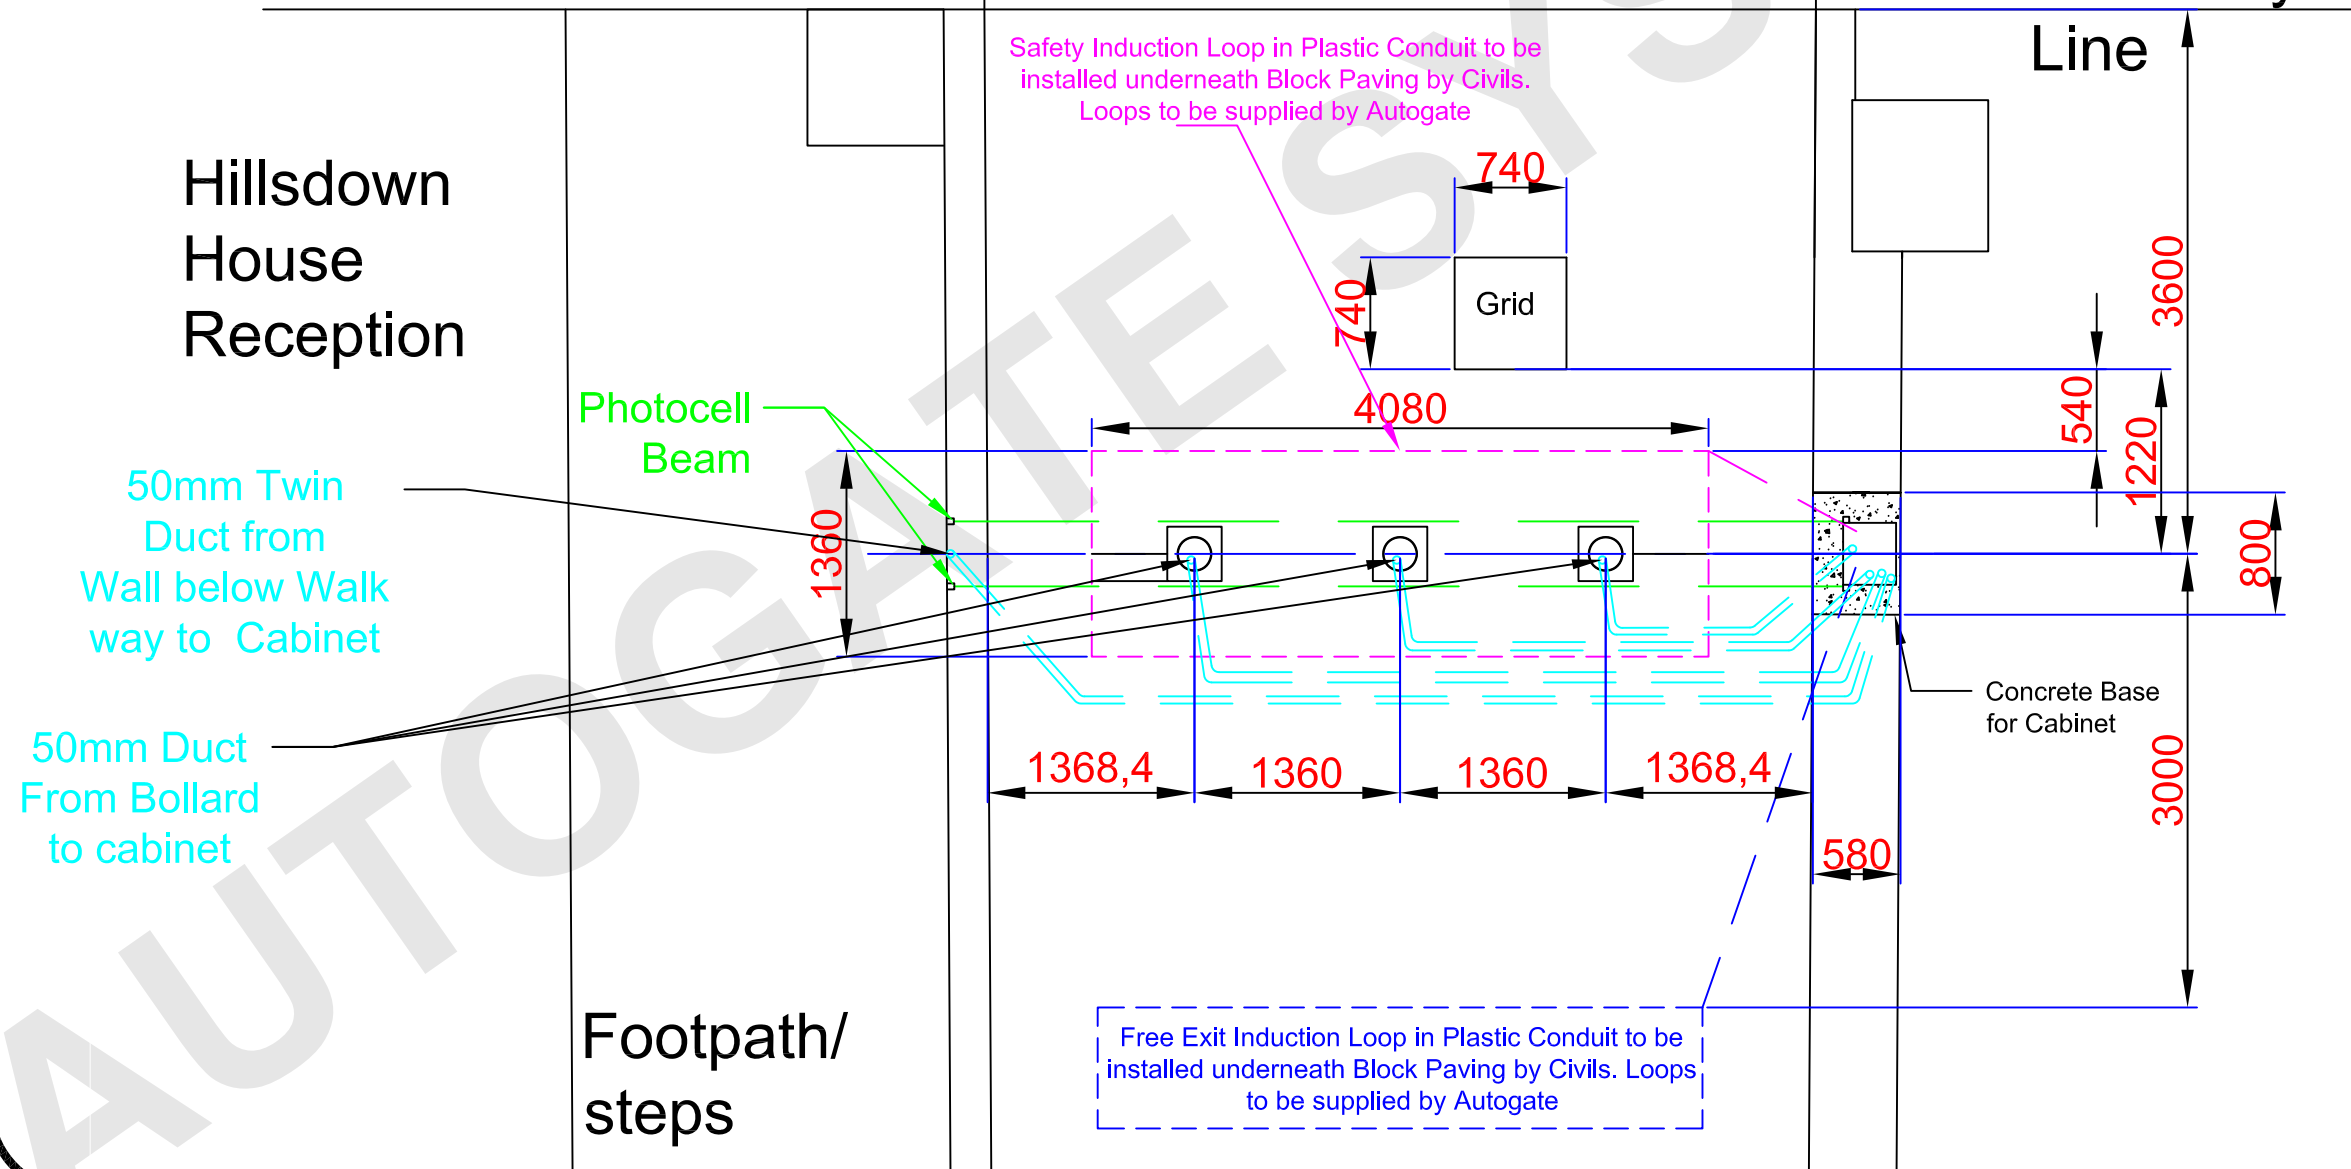

Footpath/  
steps